

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 October 2003 (23.10.2003)

PCT

(10) International Publication Number
WO 03/088241 A2

(51) International Patent Classification⁷: **G11B 20/00**,
20/12, 27/30

Petrus, H., C. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA
Eindhoven (NL). **VOLLEBREGT, Paulus, F.** [NL/NL];
Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number: PCT/IB03/01256

(22) International Filing Date: 1 April 2003 (01.04.2003)

(74) Agent: **DEGUELLE, Wilhelmus, H., G.**; Internationaal
Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eind-
hoven (NL).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02076527.7 18 April 2002 (18.04.2002) EP

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **KONIN-
KLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **BENTVELSEN,**

[Continued on next page]

(54) Title: METHOD OF COPY DETECTION AND PROTECTION USING NON-STANDARD TOC ENTRIES

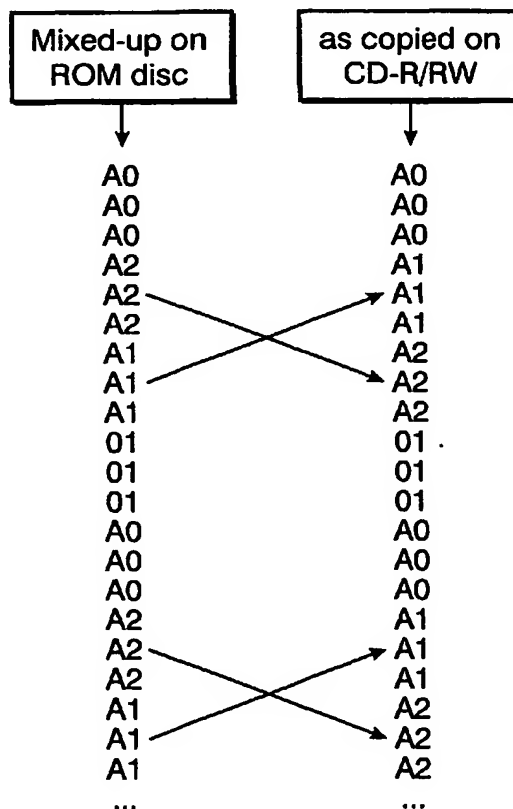

(57) Abstract: The invention relates to a method of copy detection of a record carrier. In one particular embodiment the table of content entries are mastered on the record carrier in a detectable non-standard way, e.g. the sequence of table of content entries is mixed or the number of repetitions is varied. According to another embodiment additional synchronization symbols are used in one or more subcode frames which can be detected by a read-out device in order to distinguish between an original or a copy of a record carrier.



WO 03/088241 A2